


- 耐環境條件長期 / 移動觀測
- 高感度 $10 \mu V / W / m^2$
- 波長範圍 305~2800nm
- 構造堅固，穩定可靠
- Second class pyranometer according to ISO 9060

規格特性

- ◆ 靈敏度: 約 $10 \mu V / W / m^2$
- ◆ 非線性誤差: $\leq 2\%$
- ◆ 波長範圍: 305~2800nm
- ◆ 量測範圍: $0 \sim 2000 W / m^2$
- ◆ 反應時間: $< 18 \mu s (95\%)$
- ◆ 重複性: $\pm 1.0\%$
- ◆ 供給電源: DC 10~30V (LP PYRA 03AC)
- ◆ 外型尺寸: 54x50H (mm), $\Phi 32$ (mm)
- ◆ 重量: 約 0.3kg

配線圖

Sensor M12 male connector

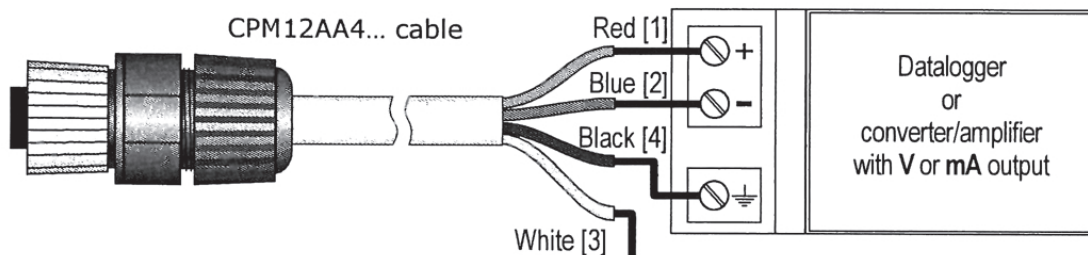

Connect to ground only if it is not possible to ground locally the case of the pyranometer