

3 1/2位數盤面型數位電錶(24X48mm)

(3 1/2 DIGITAL PANEL METER)(24X48mm)

MODEL
MMS-L



■特點(FEATURES)

- 精確度0.1%滿刻度±1位數(Accuracy 0.1% F.S.±1digit)
- 可量測交直流電流/交直流電壓/電位計/Pt-100/荷重元/電阻等信號
(Measuring DCA/DCV/ACA/ACV/Potentiometer/Pt-100/Load Cell/Resistor/etc.....)
- 小數點可任意規劃(Decimal point can be modified)
- 尺寸小(24x48x48.5mm),穩定性高(Dimension small (24x48x48.5mm) and High stability)
- 分離式端子,配線容易(Discrete terminal,connector easy)

1.MODEL:MMS-L

(選購型號)


NO	Input Type	NO	DCV(ACV)	NO	DCA(ACA)	NO	Potentiometer	NO	Pt-100(RTD)	NO	Load Cell	NO	Aux.Power
A	DC	11	0-50mV	21	0-19.99uA	31	0~10%	51	-50.0~+50.0°C	61	2mV/V	A	DC5V(Non-isolating)
B	AC(RMS)	12	0-5V	22	0-199.9uA	32	0~50%	52	-100.0~+100.0°C	62	3mV/V	B	DC5V(Isolating)
D	Potentiometer	13	0-10V	23	0-1.999mA	33	0-100%	53	-199.9~+199.9°C	69	SPECIFIED	C	DC10-30V(Non-isolating)
F	Pt-100(RTD)	14	0-36V	24	0-19.99mA	34	5-95%	59	SPECIFIED	•Exciting DC5V(<25mA)		D	DC10-30V(Isolating)
H	Load Cell	15	0-54V	25	0-199.9mA	39	SPECIFIED	•Three wire connection •non-programmable		•Less±10% for input •Less 1VA for input			
R	Resistor	16	0-110V	26	0-1.999A			•Three wire connection •Exciting voltage DC2.5V(<10mA)					
O	SPECIFIED	17	0-600V	27	0-5.00A								
		19	SPECIFIED	29	SPECIFIED								

2.SPECIFICATION (主要規格)

- Measuring accuracy : 0.1% F.S.±1 digit
(精確度) (23±5°C) 0.2% F.S.±1 digit(AC)
- Sampling time : 2.5 cycles/sec.
(取樣時間)
- Readout range : 0~±150 digit adjustable
(顯示值範圍)
- Zero (offset) range : 0~±100 digit adjustable
(歸零調整範圍)
- Over input indication : " 1 " or "-1 "
(過載顯示)
- Display : Red high efficiency LEDs high 10.16mm(0.4")
(顯示幕)
- Polarity display : When input is negative "-" display
(極性顯示)
- Temp. coefficient : 50ppm/°C (0~50°C)
(溫度係數)
- Dielectric strength : 1KVac/1 min. (input/power)
(絕緣耐壓能力)
- Operating condition : 0-50°C (20 to 90% RH non-condensed)
(使用環境條件)
- Storage condition : 0-70°C (20 to 90% RH non-condensed)
(存放環境條件)
- Outside dimension : 24x48x48.5mm
(外型尺寸)
- CE EMC Certification : EN 55022:1998/A1:2000 Class A
(CE認證)
EN 61000-3-2:2000
EN 61000-3-3:1995/A1:2001
EN 55024:1998/A1:2001

3.Program of span and zero and decimal point set

(顯示值之小數點設定與歸零值與最大值校正位置圖)

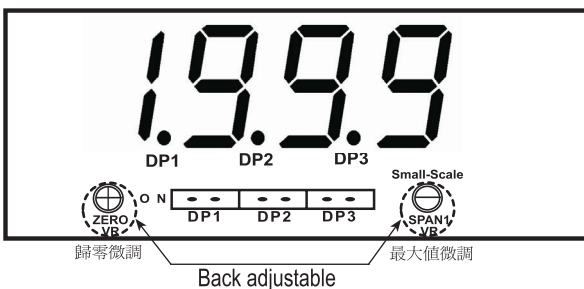

4.OUTSIDE DIMENSION AND CONNECTION DIAGRAM

(外型尺寸與開孔尺寸與配線圖)

